


## adapter 200 A (32 214)

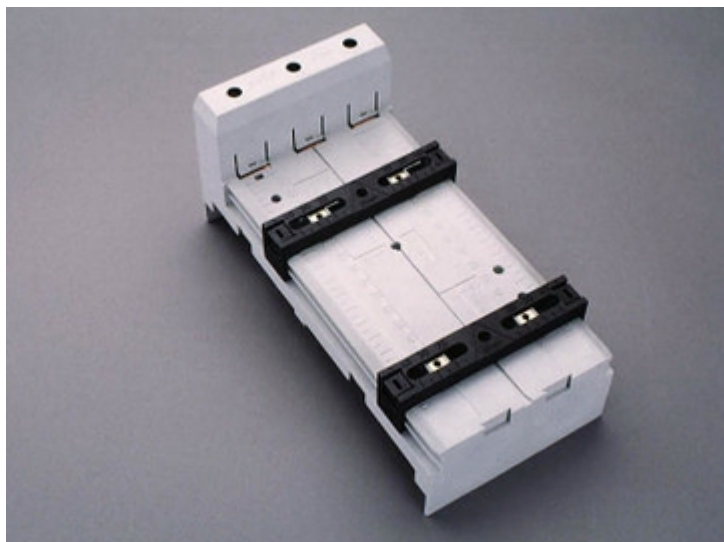

### Description

#### Article

Part No.: 32 214

EQUES® 60Classic

adapter 200 A

terminals 70 mm<sup>2</sup> at top

108 x 222

for busbars 12, 15, 20, 25, 30 x 5, 10 and section busbars

#### System

60Classic

Product group 05

Subgroup 36

pack size 1

EAN 4021267322144

Catalog page 2015 : 2/17

eCl@ss 6.1 27370304  
eCl@ss 7.1 27370304  
ETIM 4.0 EC001531  
ETIM 5.0 EC001531

## Approvals

### Standards

IEC 61439-1:2011

### Approvals

CSA, UL, Germanischer Lloyd



Type number: 60200

UL file: E123577, UL category (for USA): NMTR2 <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR8 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

CCC approval: no certification required

## Product data

### Electrical data

Rated current (IEC): 200 A

Rated voltage (IEC) AC: 690 V

Rated current (UL): 200 A

Rated voltage (UL) AC: 600 V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 10.6 W.

(The power dissipation for operation with rated current would be 16.6 W.)

rated isolation voltage  $U_i$  (AC): 800  
V  
Rated surge voltage  $U_{imp}$  : 6 kV  
max. permitted voltage (IEC) AC: 800  
V  
max. permitted voltage (IEC) DC: 800  
V

rated peak withstand current  $I_{pk}$  : 46.9 kA

### **Mechanical data**

W x H x D: 108 x 222 x 39  
Weight: 84.2 kg/100  
Poles: 3-pole  
for busbars: 12, 15, 20, 25, 30 x 5, 10 and section busbars


### **Material properties**

Body: temperature stability 125°C,  
self-extinguishing in acc. to UL 94,  
creepage resistance CTI 600,  
halogen-free

### **Reference**

Movable fastening rails with M4 slide nuts for safe mounting of the switching devices.

## Accessories



**32 937**

slide nut M5

for 32 168, 32 214, 32 215, 32 216