


PE/N-support (01 601)

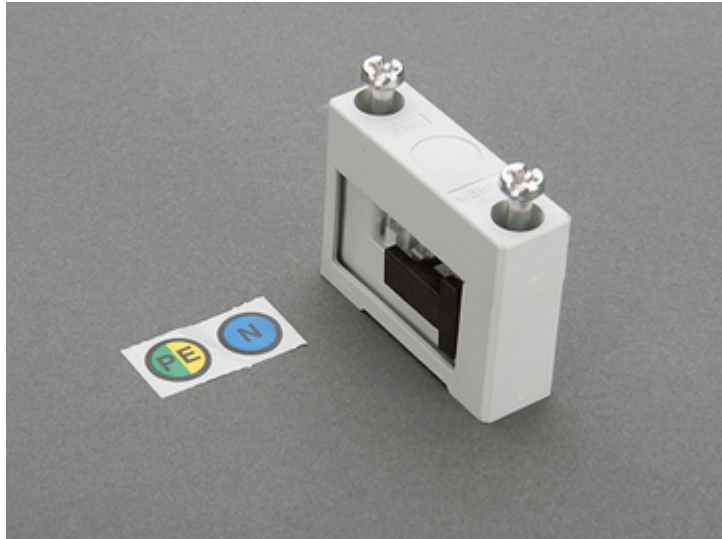

Description

Article

Part No.: 01 601

PE/N-support

1-pole, indiv. mountable

for busbars 12, 20, 30 x 5, 10

for busbars 12, 20, 30 x 5, 10

System

60Classic

Product group 06

Subgroup 03

pack size 1

EAN 4021267016012

Catalog page 2015 : 2/1, 6/2

eCl@ss 6.1 27400607
eCl@ss 7.1 27400607
ETIM 4.0 EC001166
ETIM 5.0 EC001166

Approvals

Standards

IEC 61439-1:2011

Approvals

UL, Germanischer Lloyd



for UL feeder circuits >250V

Type number: S489-L

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR8 <http://www.ul.com>

CCC approval: no certification required

Product data

Electrical data

Rated voltage (IEC) AC: 690
V

Rated voltage (UL) AC: 600
V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 0 W.

(The power dissipation for operation with rated current would be 0 W.)

Rated surge voltage U_{imp} : 6 kV
max. permitted voltage (IEC) AC: 1000
V
max. permitted voltage (IEC) DC: 1500
V

Anzugsdrehmomente der Schrauben: 4 Nm

UL :

SCCR = 14 kA (Schienenträger im Abstand von 400 mm)

Mechanical data

W x H x D: 20 x 65 x 49.5

Weight: 5.9 kg/100

Poles: 1-pole

for busbars: 12, 20, 30 x 5, 10

Material properties

Main temperature stability 125°C,


body: self-extinguishing in acc. to UL 94,

creepage resistance CTI 600,

halogen-free

Screws: screw +/- (PZ3), galvanized, chromized

Accessories



01 325

end cover

for busbar support 01 356 and 01 601