

■ DATASHEET: HRC FUSE LINKS SIZE 2




■ SCHRACK INFO

NH LV HRC fuse links conform to the international standard IEC 60269
Combi indicator: top and centreindicator


■ TECHNICAL DATA

Size	NH2	
Rated voltage	AC400V	
Rated current	35-400A	
Rated breaking capacity	100kA	
Utilization category	gG	
Standards	IEC/EN 60269-1	
	DIN VDE 0636-2	
Powerdissipation	63A	5,5A
	80A	6,4A
	100A	7,6A
	125A	8,7A
	160A	12,3A
	200A	13,5A
	225A	15,4A
	250A	17,6A
	315A	21,9A
	400A	26,3A
Weight	63-250A	430g
	300-400A	500g


TIME CURRENT CHARACTERISTICS

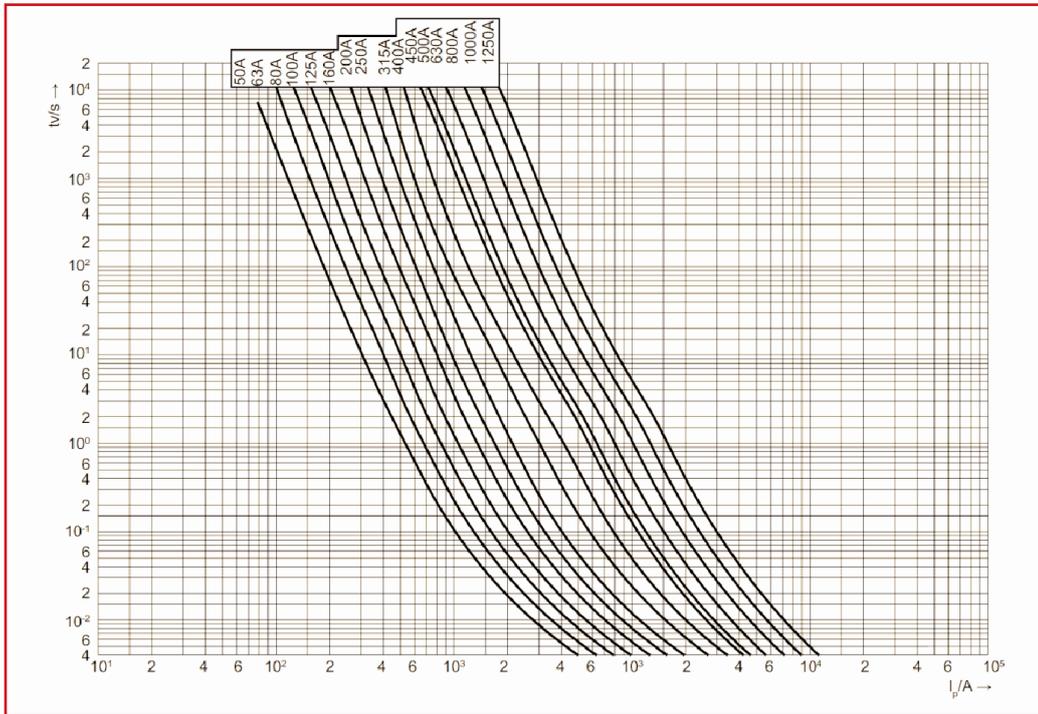


PEAK LET-THROUGH CURRENT CHART

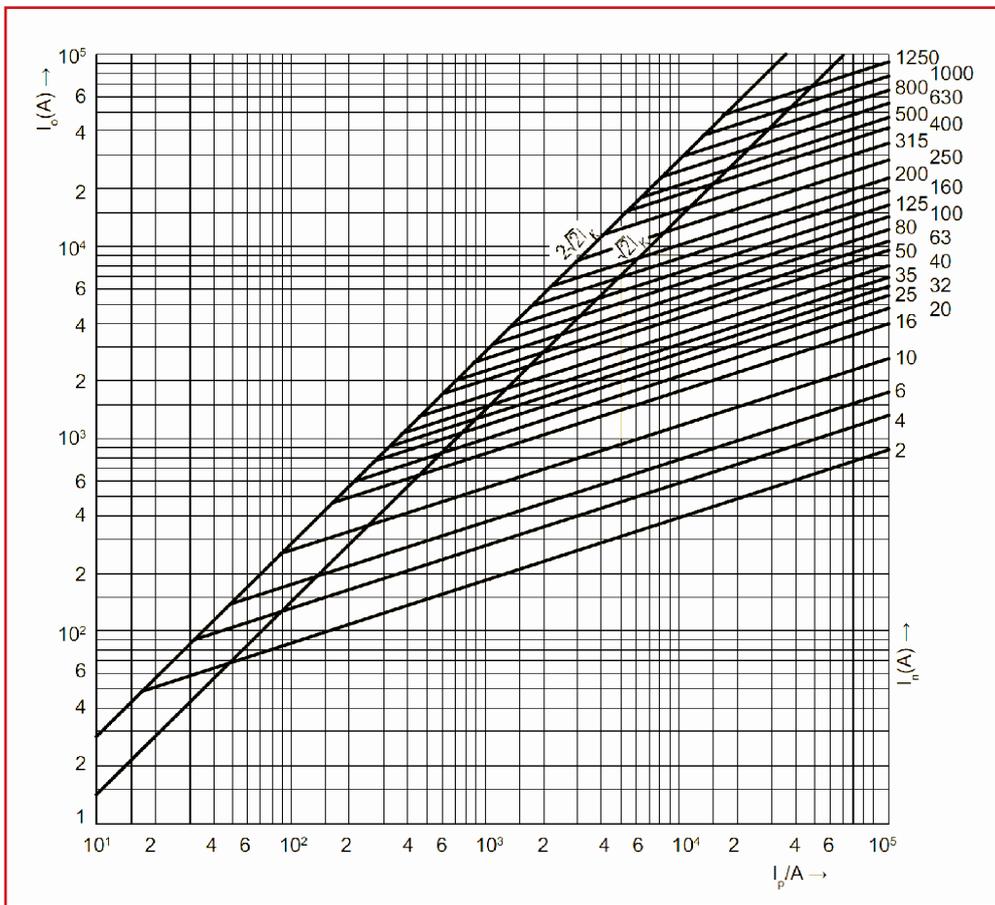

■ DIMENSIONS: 63-250A

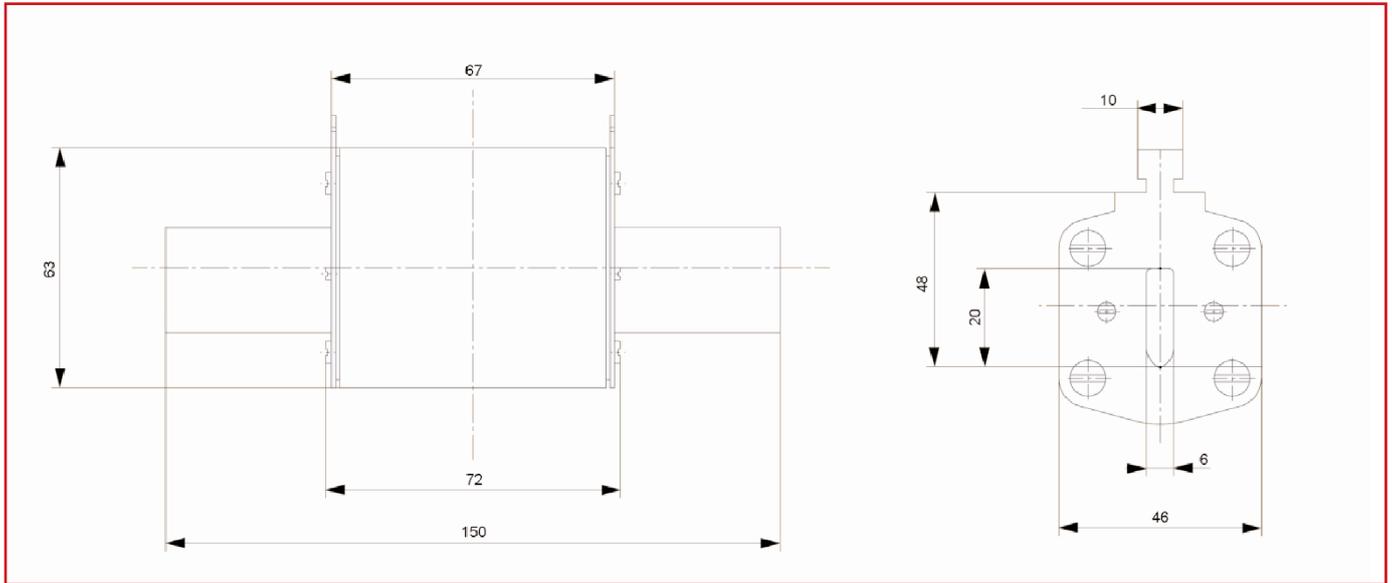

■ DIMENSIONS: 300-400A

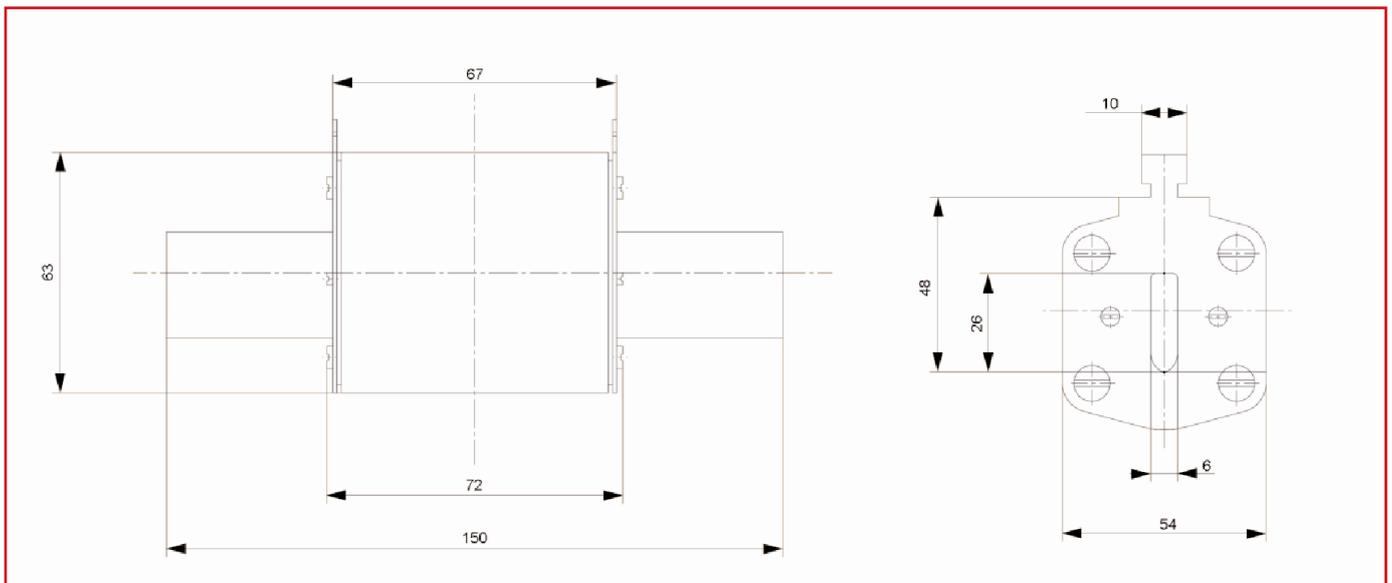

DESCRIPTION	EAN	ORDER NO.
HRC fuse elemt, size 2, 63A, 400V AC	9004840508079	ISPO2063
HRC fuse elemt, size 2, 80A, 400V AC	9004840508116	ISPO2080
HRC fuse elemt, size 2, 100A, 400V AC	9004840508123	ISPO2100
HRC fuse elemt, size 2, 125A, 400V AC	9004840508130	ISPO2125
HRC fuse elemt, size 2, 160A, 400V AC	9004840508154	ISPO2160
HRC fuse elemt, size 2, 200A, 400V AC	9004840538496	ISPO2200
HRC fuse elemt, size 2, 224A, 400V AC	9004840508239	ISPO2225
HRC fuse elemt, size 2, 250A, 400V AC	9004840508246	ISPO2250
HRC fuse elemt, size 2, 315A, 400V AC	9004840508253	ISPO2315
HRC fuse elemt, size 2, 400A, 400V AC	9004840508307	ISPO2400