


## connecting set, 3-pole L1-L2-L3 (01 370)

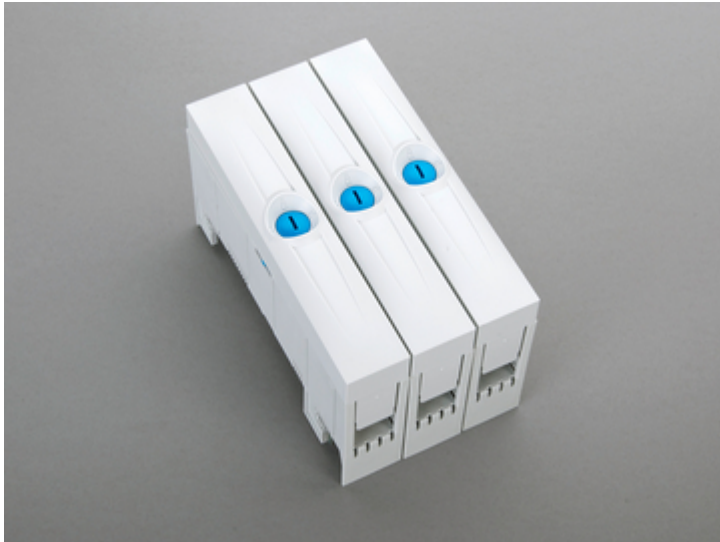

### Description

#### Article

Part No.: 01 370

CRITO<sup>®</sup> 30Compact

connecting set, 3-pole L1-L2-L3

10 - 120 mm<sup>2</sup>

for busbars 12 x 5, 10

#### System

30Compact 3P

30Compact 5P

**Product group** 07

**Subgroup** 45

**pack size** 1

**EAN** 4021267013707

**Catalog page** 2015 : 1/5

eCl@ss 6.1 27141146  
eCl@ss 7.1 27141146  
ETIM 4.0 EC000001  
ETIM 5.0 EC000001

## Approvals

### Standards

IEC 61439-1:2011  
IEC 60999-1:1999  
IEC 60999-2:2003

### Approvals

UL



for UL feeder circuits >250V

Type number: M120-L

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>

CCC approval: no certification required

## Product data

### Electrical data

Rated current (IEC): 250 A

Rated voltage (IEC) AC: 690 V

Rated voltage (UL) AC: 600  
V

rated peak withstand current  $I_{pk}$  : 35.4 kA

rated short-time withstand current  $I_{CW}$  : 3,5 kA / 1s

SCCR: 18 kA

**Mechanical data**

W x H x D: 90 x 160 x 80

Weight: 60 kg/100

Poles: 3-pole

for busbars: 12 x 5, 10

**Terminal points**

35 - 120 mm<sup>2</sup> / AWG 6 - MCM 250

flexible cables, directly or with wire-end ferrule,

stranded round cables,

la. Cu 12x4 - 15,5x10

(flexible cables of maximum cross-section may not fit when using wire-end ferrule)

**Material properties**

Main temperature stability 125°C,

body: self-extinguishing in acc. to UL 94,

creepage resistance CTI 200

Cover: temperature stability 125°C,

self-extinguishing in acc. to UL 94,

creepage resistance CTI 200