



FORK- AND PIN-BUSBARS

Cross section	10 mm ²
FEEDING AT BEGINNING / ENDING	
Max. current I_s /Phase	63 A
Connection cross current	10 mm ²
OTHER FEEDINGS	
Max. feeding current I_s /Phase	80 A
Cross section of connection	25 mm ²

FEEDING AT BEGINNING OR END OF BAR

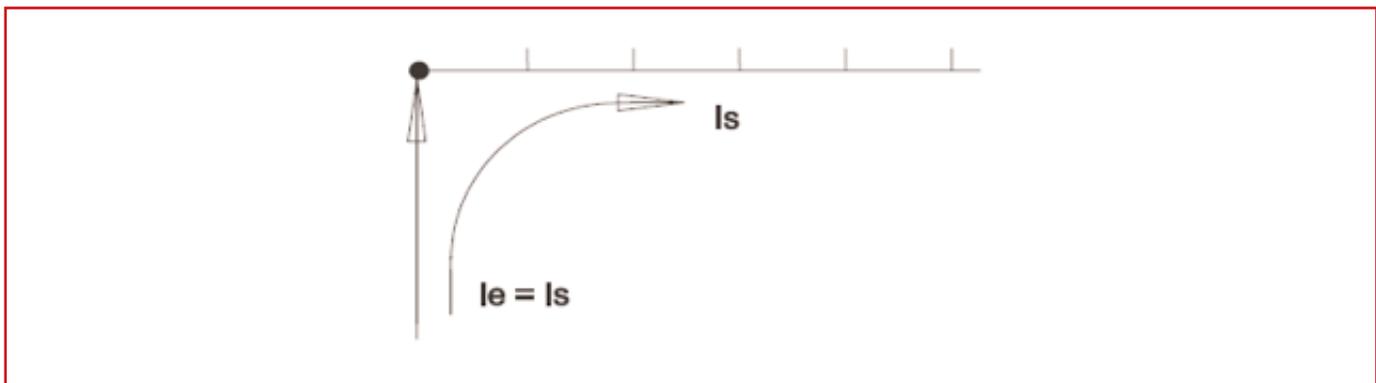

OTHER FEEDINGS

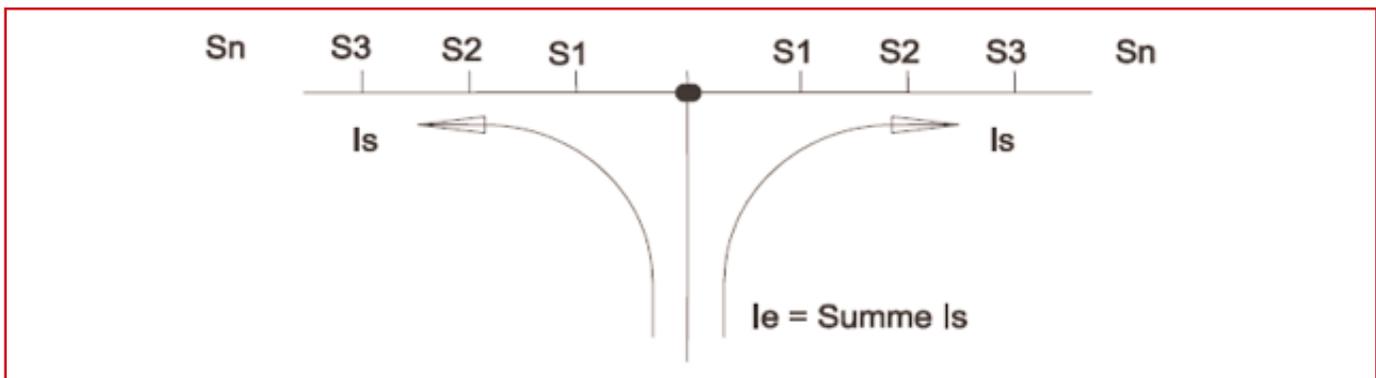

NOTE

When shortening the busbars please note, that the copper-bars need to be 10mm shorter than the insulation on both ends. Due to security purposes all shortened busbars need to be covered with suitable endcovers.

DESCRIPTION/CROSS SECTION	SU	PU	ORDER NO.
Pin-Busbar 10 mm ²	56	1	BS990111ME