


busbar component support (32 477)

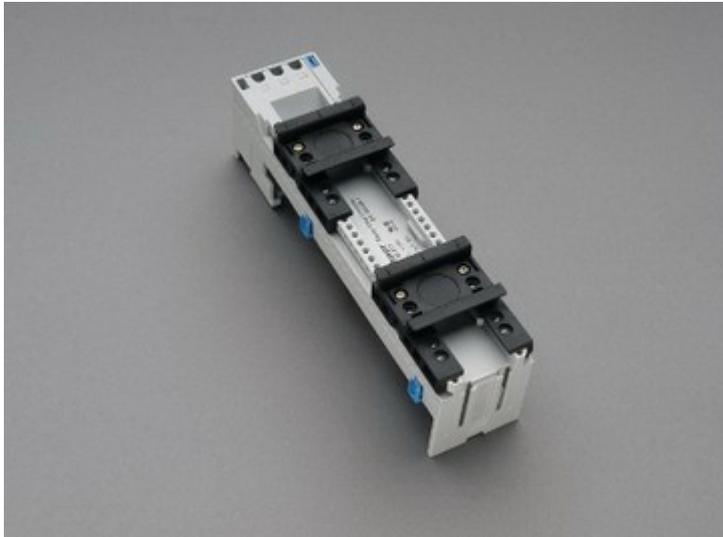

Description

Article

Part No.: 32 477

EQUES[®] 60Classic

busbar component support

2 adjustable mounting rails

45 x 200, without electrical connection

for busbars 12, 15, 20, 25, 30 x 5, 10 and section busbars

System

60Classic

Product group 05

Subgroup 17

pack size 4

EAN 4021267324773

Catalog page 2015 : 2/13

eCl@ss 6.1 27370304
eCl@ss 7.1 27370304
ETIM 4.0 EC001531
ETIM 5.0 EC001531

Approvals

Standards

IEC 61439-1:2011

Approvals

CSA, UL, Germanischer Lloyd



for UL feeder circuits >250V

Type number: EEC6000-L

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

CCC approval: no certification required

Product data

Electrical data

Rated voltage (IEC) AC: 690
V

Rated voltage (UL) AC: 600
V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 0 W.

(The power dissipation for operation with rated current would be 0 W.)

rated isolation voltage U_i (AC): 800
V
Rated surge voltage U_{imp} : 6 kV
max. permitted voltage (IEC) AC: 800
V
max. permitted voltage (IEC) DC: 800
V

short-circuit withstandability: not applicable, since the product does not contain or carry any live parts or is not stressed in the case of a short-circuit

Mechanical data

W x H x D: 45 x 200 x 63
Weight: 24.8 kg/100
for busbars: 12, 15, 20, 25, 30 x 5, 10 and section busbars


Material properties

Body: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free
DIN rail: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 550,
halogen-free
Screws: screw +/- (PZ1), galvanized, chromized


Reference

For compact mounting of complete motor circuits with commercially available switchgear and safe mechanical and electrical connection to the busbar system.

Accessories

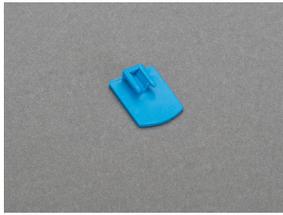

32 969
mounting rail end stop

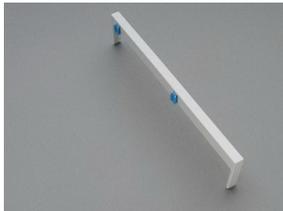

32 963
side-mounted module for busbar adapters
attachable at both sides
9 x 200